


Mechanical Data


- Weight: 2.7088 grams (Approximate)
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note1) ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Package 3D Photo



Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

Package Outline Dimensions

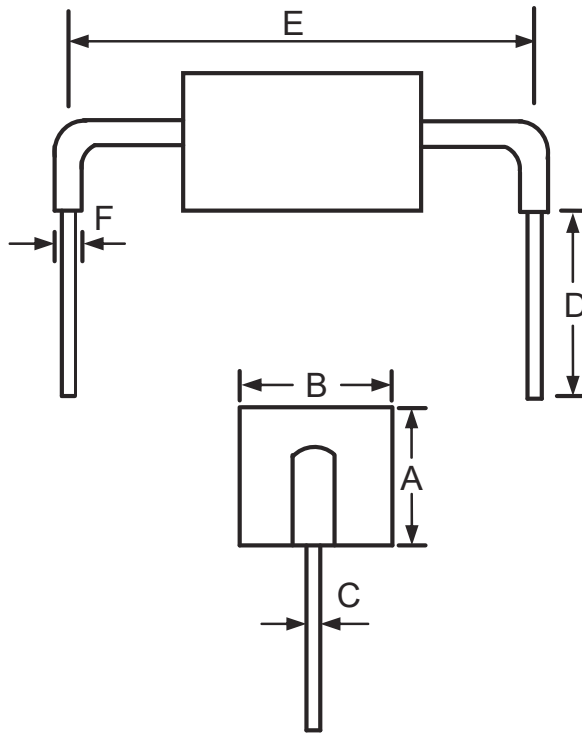

DIMENSIONS					NOTE
DIM	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	-----	0.630	-----	16.00	
B	-----	0.709	-----	18.00	
C	0.047	0.052	1.20	1.32	
D	0.197	-----	5.00	-----	
E	0.922	0.979	23.43	24.87	
F	-----	0.157	-----	4.00	


Packing Quantity

Package	Part Number Prefix	Inbox Quantity	Carton Quantity
AK	AK1/AK3/AK6/AK10	150	1800
	AK15	80	960

Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.


Dimensions

Inbox Size

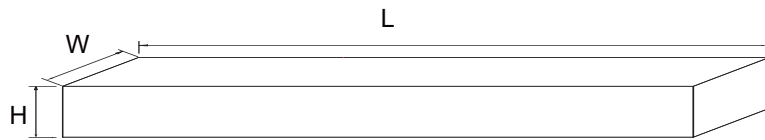

Description	Dimension	Specification(mm typical)
Length	L	185
Width	W	185
Height	H	70

Carton Size

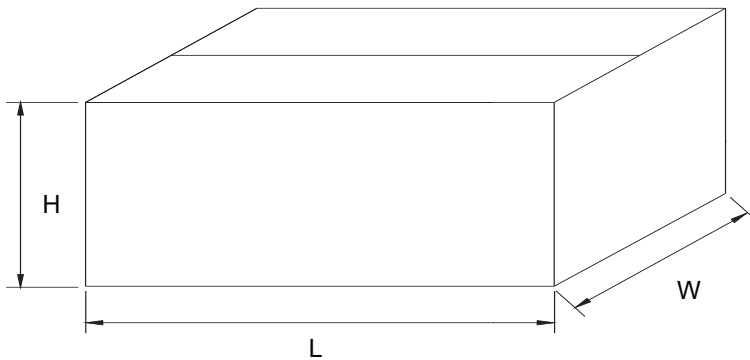

Description	Dimension	Specification(mm typical)
Length	L	390
Width	W	390
Height	H	230