


Mechanical Data


- Weight: 4.0280 grams (Approximate)
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note¹) ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Package 3D Photo



Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

Package Outline Dimensions

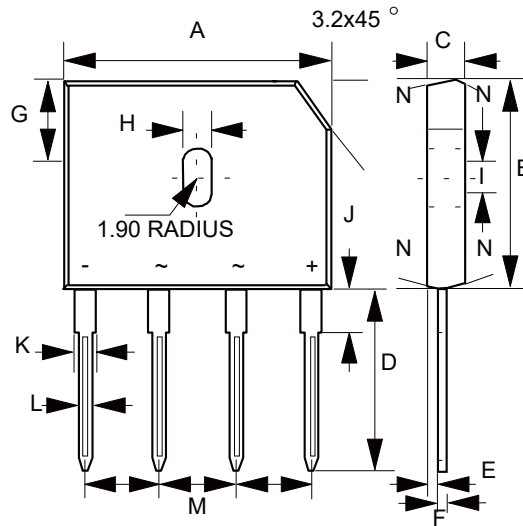

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.860	0.880	21.80	22.30	
B	0.720	0.740	18.30	18.80	
C	0.130	0.142	3.30	3.60	
D	0.690	0.717	17.50	18.20	
E	0.030	0.039	0.76	1.00	
F	0.018	0.024	0.46	0.60	
G	0.290	0.310	7.40	7.90	
H	0.140	0.160	3.50	4.10	
I	0.065	0.085	1.65	2.16	
J	0.060	0.096	1.52	2.45	
K	0.077	0.098	1.95	2.50	
L	0.040	0.050	1.02	1.27	
M	0.190	0.210	4.83	5.33	
N	7.0°				TYP.


Packing Quantity

Package	Package Type	Tube Quantity	Box Quantity	Carton Quantity
GBU	Tube	20	1000	2000

Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.


Dimensions

Tube Size

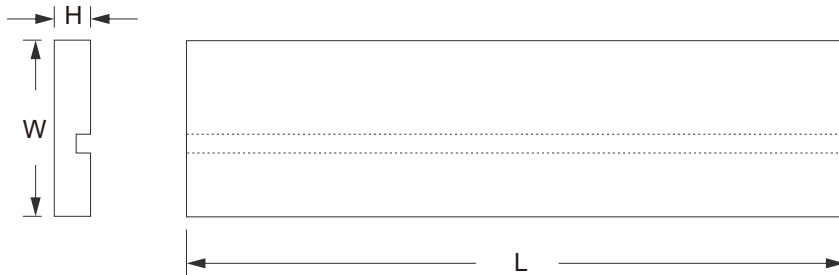


Description	Dimension	Specification(mm typical)
Length	L	465
Width	W	41
Height	H	6.1

Inbox Size

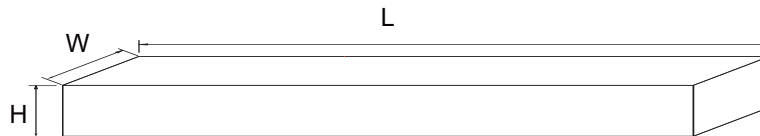

Description	Dimension	Specification(mm typical)
Length	L	480
Width	W	170
Height	H	88

Carton Size

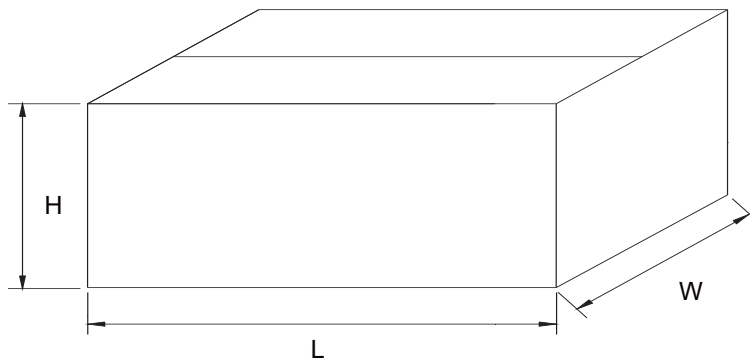

Description	Dimension	Specification(mm typical)
Length	L	495
Width	W	365
Height	H	105