


**Mechanical Data**


- Weight: 5.6000 grams (Approximate)
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note<sup>1</sup>) ("P" Suffix Designates RoHS Compliant. See Ordering Information)

**Package 3D Photo**



Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

**Package Outline Dimensions**

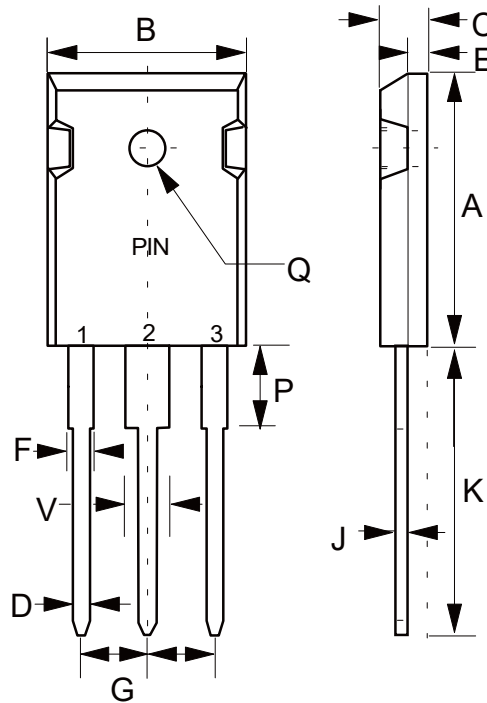

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.787	0.866	20.00	22.00	
B	0.598	0.638	15.20	16.20	
C	0.185	0.208	4.70	5.30	
D	0.035	0.059	0.90	1.50	
E	0.059	0.094	1.50	2.40	
F	0.067	0.091	1.70	2.30	
J	0.019	0.031	0.48	0.80	
K	0.748	0.833	19.00	21.15	
P	0.122	0.189	3.10	4.80	
Q	0.118	0.150	3.00	3.80	Φ
V	0.106	0.134	2.70	3.40	
G	0.197	0.224	5.00	5.70	


## Packing Quantity

Package	Package Type	Tube Quantity	Box Quantity	Carton Quantity
TO-247	Tube	30	360	1800

Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.


## Dimensions

### Tube Size

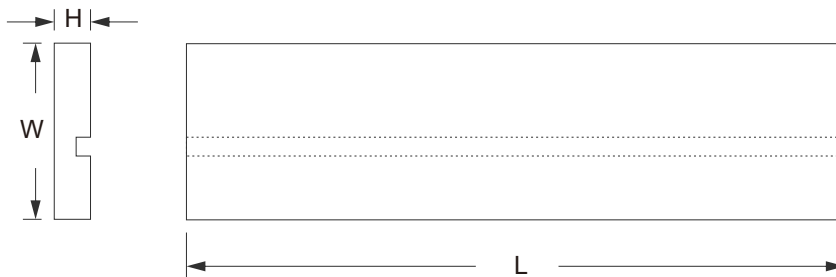


Description	Dimension	Specification(mm typical)
Length	L	495
Width	W	45
Height	H	7

### Inbox Size

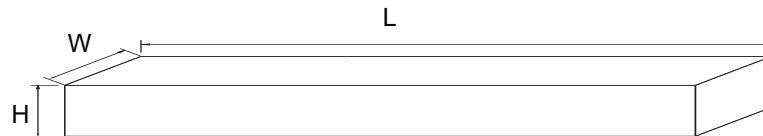

Description	Dimension	Specification(mm typical)
Length	L	520
Width	W	115
Height	H	60

### Carton Size

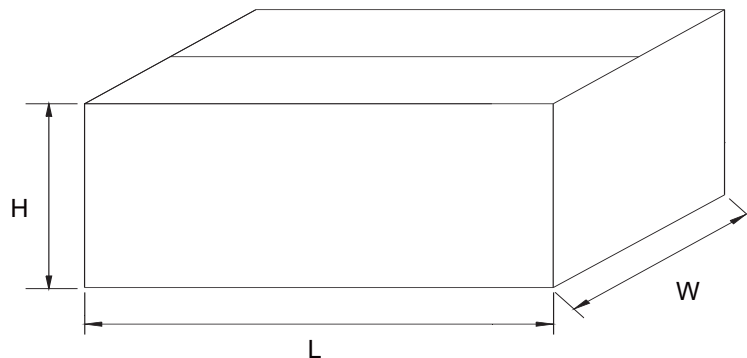

Description	Dimension	Specification(mm typical)
Length	L	550
Width	W	325
Height	H	135